

200W

ELECTROMAGNETIC BRAKE MOTOR
□90㎜ LEAD WIRE TYPE

SIZE mm sq.	Type	Poles	Output	Voltage	Frequency	Duty	Rated Load				Starting Torque		Capacitor
							Current	Speed	Torque				
			(W)	(V)	(Hz)		(A)	(rpm)	(kg-cm)	(N-m)	(kg-cm)	(N-m)	(uF)
90	S9I200GT-E	4	200	3 Ø 220	50	Cont.	1.3	1300	15.00	1.500	30.00	3.000	—
					60		1.2	1550	12.90	1.290	25.00	2.500	
	S9I200GS-E	4	200	3 Ø 380	50	Cont.	0.62	1250	16.00	1.600	26.00	2.600	—
					60		0.55	1500	13.40	1.340	22.00	2.200	
				3 Ø 400	50	Cont.	0.64	1250	16.00	1.600	30.00	3.000	—
					60		0.55	1500	13.40	1.340	25.00	2.500	

❖ 상기 MODEL은 TP가 내장된 THERMALLY PROTECTED TYPE입니다. (TP marked at the end of the model name indicates that it is standard motor with Thermal Protector mounted.)
❖ 'H' Type 전용으로 기종명에 표시하지 않습니다. (Only "H" type is applicable.)
❖ 삼상 380V~440V 모터에서는 인버터 사용을 주의하여 주십시오. 인버터 사용시 권선의 절연이 열화되어 모터가 파손될 수 있습니다. (For a three-phase 380V~440V motor, be cautious when using the inverter. When inverter is used, the insulation of winding becomes hot and may cause damage to motor.)

50Hz

GEAR RATIO / MODEL		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
	rpm	500	416	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8	7.5
S9KH□B	kg-cm	39.0	47.0	64.8	77.8	97.2	117	130	146	175	210	233	262	300	300	300	300	300	300	300	300	300	300	300	300
	N·m	3.813	4.609	6.355	7.626	9.532	11.47	12.75	14.32	17.16	20.59	22.88	25.74	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42

60Hz

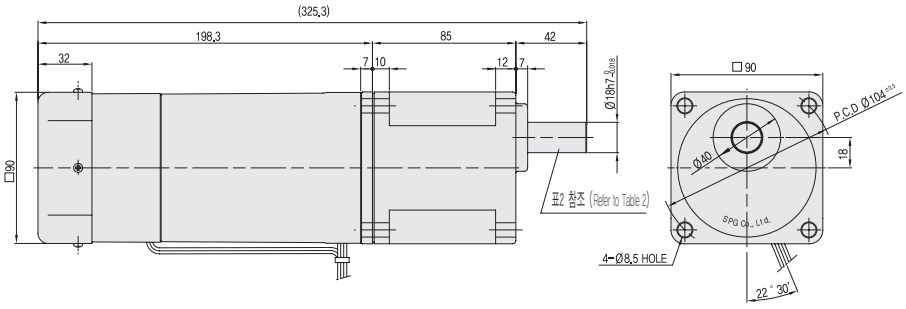
GEAR RATIO / MODEL		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
	rpm	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
S9KH□B	kg-cm	32.0	38.3	53.3	64.0	79.9	96.0	107	120	144	173	192	216	259	300	300	300	300	300	300	3000	300	300	300	300
	N·m	3.134	3.760	5.223	6.267	7.384	9.414	10.49	11.75	14.10	16.97	18.83	21.18	25.40	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42	29.42

❖ GEAR HEAD 품명중 □은 감속비를 표시합니다. (The code in □ of gearhead model is for gear ratio.)
❖ GEAR HEAD와 조합한 경우의 허용 TORQUE입니다. (It is the permissible torque of the assembled motor and gearhead.)
❖ 회전방향은 ■색이 MOTOR의 회전방향과 동일방향이고, 기타는 MOTOR 회전방향과 반대방향입니다. (■ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.)
❖ 회전수는 MOTOR의 동기 회전수(50Hz : 1500rpm, 60Hz : 1800rpm)를 기준으로 하여 감속비로 나누어서 계산하였습니다. 실제의 회전수는 부하의 크기에 따라서 표시된 수치보다 2~20% 적습니다. (Rpm is based on synchronous speed (50Hz: 1500rpm, 60Hz: 1800rpm) divided by gear ratio. The actual rotation speed can be 2~20% less than displayed value depending on the load.)
❖ 'H' Type 전용으로 기종명에 표시하지 않습니다. (Only "H" type is applicable.)

DIMENSIONS

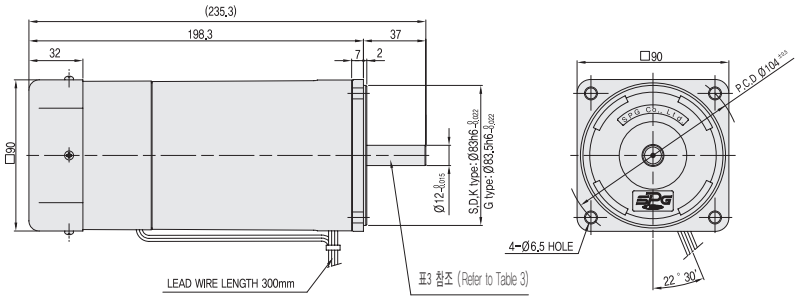
GEARED MOTOR

※MOTOR MODEL : S9I200G□-E
※HEAD MODEL : S9□H3B~S9□H200B



MOTOR



※MOTOR MODEL : S9I200□□-E






WEIGHT – (표1 (Table1))

PART		WEIGHT(kg)
MOTOR		4.18
GEAR HEAD	S9□H3B ~S9□H10B	1.65
	S9□H12.5B ~S9□H20B	1.80
	S9□H25B ~S9□H60B	1.90
	S9□H75B ~S9□H200B	1.95




KEY SPEC

GEAR HEAD	MOTOR
	

GEAR HEAD 출력축 사양 (SPEC for output shaft of gearhead) – (표2 (Table2))

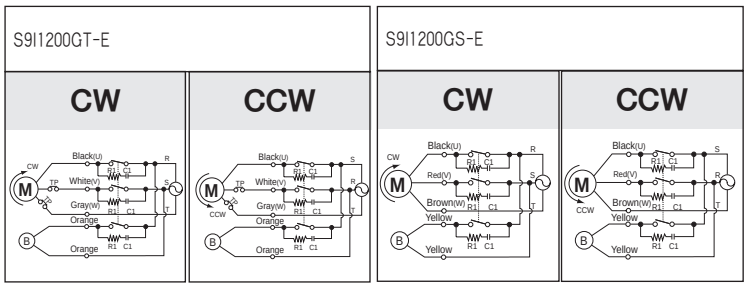
MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
STRAIGHT TYPE S9SH3B ~S9SH200B	
D-CUT TYPE S9DH3B ~S9DH200B	
KEY TYPE S9KH3B ~S9KH200B	

MOTOR 출력축 사양 (SPEC for output shaft of motor) – (표3 (Table3))

MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
GEAR TYPE S9I200G□-E	
STRAIGHT TYPE S9I200S□-E	
D-CUT TYPE S9I200D□-E	
KEY TYPE S9I200K□-E	

SCHEMATIC DIAGRAMS

회전방향은 MOTOR의 SHAFT 끝쪽에서 볼 때의 회전방향입니다. (The direction of motor rotation is as viewed from the front shaft end of the motor.)



$R_1 = 10 \sim 200\ \Omega$ (Min.1/4 W)
$C_1 = 0.1 \sim 0.33\mu F$ (AC125WV or AC250WV)