



15W

INDUCTION SPEED CONTROL MOTOR
□70mm CONNECTOR TYPE

SIZE mm sq.	Motor Type	Controller Type	Poles	Output	Voltage	Freq.	Duty	Speed Range	Permissible Torque				Starting Torque		Cap.
				(W)	(V)	(Hz)			at 1200rpm		at 90rpm		(kg-cm)	(N-m)	
70	S7I15GA-V12 S7I15GA-V12(TP) S7I15GA-V12CE	SUA715A-V12	4	15	1 ∅ 110	60	Cont.	90-1700	1.15	0.115	0.60	0.060	0.90	0.090	5.0
	S7I15GB-V12 S7I15GB-V12(TP) S7I15GB-V12CE	SUA715B-V12	4	15	1 ∅ 220	60	Cont.	90-1700	1.15	0.115	0.60	0.060	0.90	0.090	1.2
	S7I15GC-V12 S7I15GC-V12(TP) S7I15GC-V12CE	SUA715C-V12	4	15	1 ∅ 100	50	Cont.	90-1400	1.10	0.110	0.40	0.040	0.75	0.075	5.0
						60		90-1700	1.00	0.100					
	S7I15GD-V12 S7I15GD-V12(TP) S7I15GD-V12CE	SUA715D-V12	4	15	1 ∅ 200	50	Cont.	90-1400	1.10	0.110	0.40	0.040	0.75	0.075	1.2
						60		90-1700	1.00	0.100					
	S7I15GX-V12 S7I15GX-V12CE	SUA715X-V12	4	15	1 ∅ 220	50	Cont.	90-1400	1.05	0.105	0.50	0.050	0.70	0.070	0.9
					1 ∅ 240				1.25	0.125	0.60	0.060	0.85	0.085	

- 기종명 맨 끝자리에 CE가 명기된 MOTOR MODEL의 인증 관련 내용은 SPG 규격 인증품 현황을 참고하여 주십시오. (CE marked at the end of motor model name indicates that it is impedance protected type which has received CE.)
- 기종명 맨 끝자리에 (TP)가 명기된 MOTOR MODEL은 일반 MOTOR의 TP가 내장된 THERMALLY PROTECTED TYPE입니다. 또한 기종명 S7I15GX-V12, S7I15GX-V12CE는 TP가 내장된 THERMALLY PROTECTED TYPE입니다. (TP marked at the end of the motor model name indicates that it is standard motor with Thermal Protector mounted, S8I15GX-V12, S8I15GX-V12CE is thermally protected type with TP mounted.)
- 'L' Type 전용으로 기종명에 표시하지 않습니다. ('L' or 'H' type does not apply to motors under 40W.)


50Hz

GEAR RATIO	MODEL	rpm	kg-cm	N-m	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		rpm	kg-cm	N-m	500	416	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8	7.5
S7KA□B		kg-cm	3.2	3.9	5.4	6.5	8.1	9.7	10.8	13.5	16.2	19.4	19.4	24.2	29.1	34.9	38.8	43.6	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		N-m	0.314	0.382	0.530	0.637	0.794	0.951	1.059	1.324	1.587	1.902	1.902	2.373	2.854	3.423	3.805	4.276	4.900	4.900	4.900	4.900	4.900	4.900	4.900	4.900	4.900	4.900

60Hz


GEAR RATIO	MODEL	rpm	kg-cm	N-m	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		rpm	kg-cm	N-m	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
S7KA□B		kg-cm	3.0	3.6	5.1	6.1	7.6	9.1	10.1	12.7	15.2	18.2	18.2	22.8	27.3	32.8	36.5	41.0	49.2	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		N-m	0.294	0.353	0.500	0.598	0.745	0.892	0.990	1.245	1.491	1.785	1.785	2.236	2.677	3.217	3.579	4.021	4.825	4.900	4.900	4.900	4.900	4.900	4.900	4.900	4.900	4.900

- GEAR HEAD 품명 중 □는 감속비를 표시합니다. (The code in □ of gearhead model is for gear ratio.)
- GEAR HEAD와 조합한 경우의 허용 TORQUE입니다. (It is the permissible torque of the assembled motor and gearhead.)
- 감속비 1/10의 중간 GEAR HEAD를 접속한 경우의 허용 TORQUE는 50kg-cm입니다. (The permissible torque of the motor and inter-decimal gearhead is 50 kg-cm.)
- 회전방향은 색이 MOTOR의 회전방향과 동일방향이고, 기타는 MOTOR 회전방향과 반대방향입니다. (Color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.)
- 회전수는 MOTOR의 동기 회전수(50Hz : 1500rpm, 60Hz : 1800rpm)를 기준으로 하여 감속비로 나누어서 계산하였습니다. 실제의 회전수는 부하의 크기에 따라서 표시된 수치보다 2~20% 적습니다. (Rpm is based on synchronous speed (50Hz: 1500rpm, 60Hz: 1800rpm) divided by gear ratio. The actual rotation speed can be 2~20% less than displayed value depending on the load.)
- 'L' Type 전용으로 기종명에 표시하지 않습니다. ('L' or 'H' type does not apply to motors under 40W.)

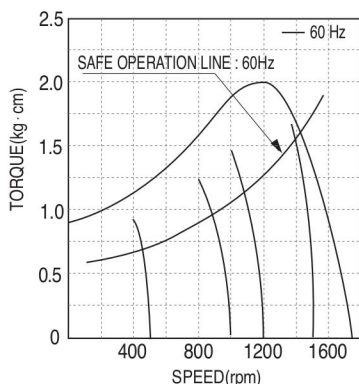


▲ S7I15GA-V12
S7I15GA-V12(TP)
S7I15GA-V12CE

▲ S7I15GB-V12
S7I15GB-V12(TP)
S7I15GB-V12CE

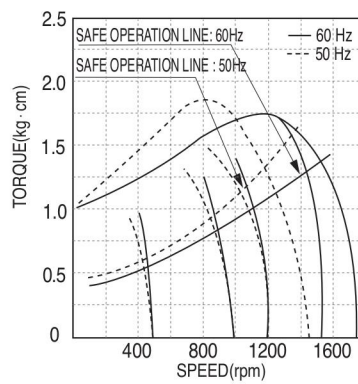

▲ S7I15GC-V12
S7I15GC-V12(TP)
S7I15GC-V12CE

▲ S7I15GD-V12
S7I15GD-V12(TP)
S7I15GD-V12CE

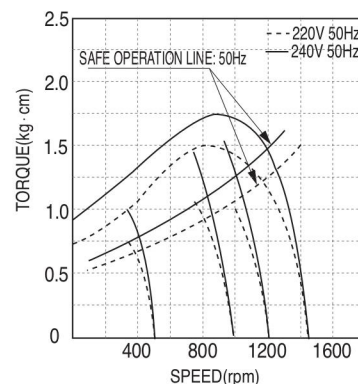


▲ S7I15GX-V12
S7I15GX-V12CE

DIMENSIONS

+ GEARED MOTOR


*MOTOR MODEL : S7I15G□-V12

※HEAD MODEL : S7□A3□~S7□A200□

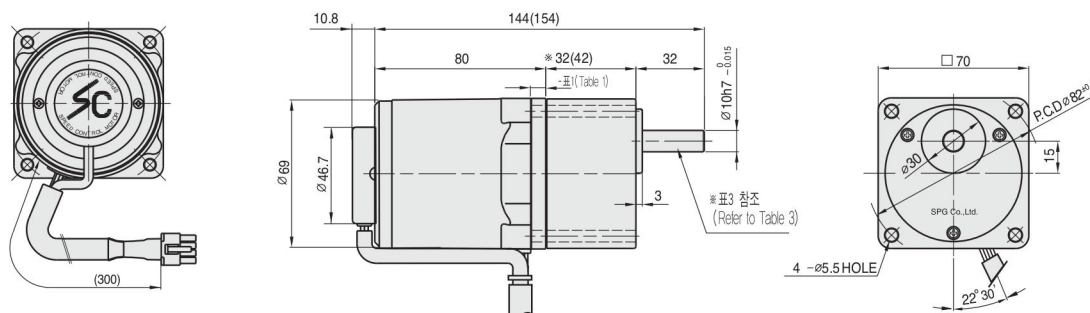


+ MOTOR

※MOTOR MODEL : S7I15G□-V12

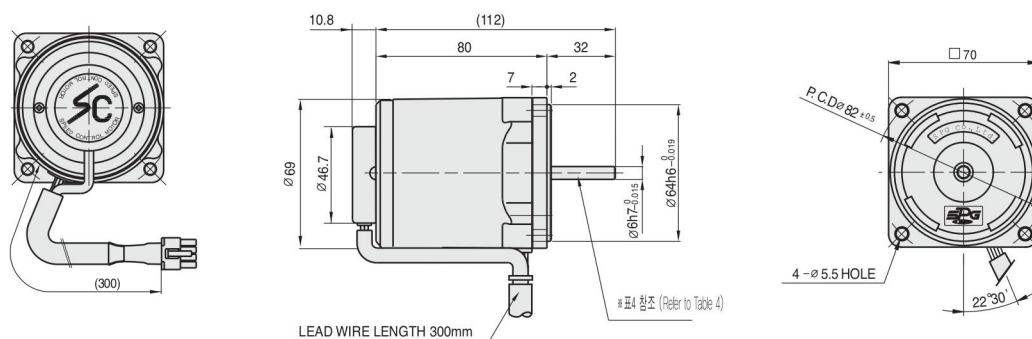

✚ INTER-DECIMAL GEAR HEAD

※MODEL : S7GX10B

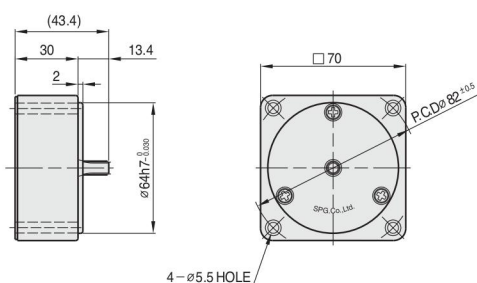

+ KEY SPEC

✚ ※32(42) – (㊦1 (Table1))

GEAR RATIO	SIZE(mm)
S7□A3□ ~ S7□A18□	32
S7□A20□ ~ S7□A200□	42

✚ GEAR HEAD 출력축 사양 (SPEC for output shaft of gearhead) - (표3 (Table3))

MODEL	별첨과장 구분 (TYPES OF OUTPUT SHAFT)
STRAIGHT TYPE	
S7SA3□ ~S7SA200□	
D-CUT TYPE	
S7DA3□ ~S7DA200□	
KEY TYPE	
S7KA3□ ~S7KA200□	

✚ MOTOR 출력축 사양 (SPEC for output shaft of motor) - (표4 (Table4))

MODEL	출력 샤프트 규격 (TYPES OF OUTPUT SHAFT)
GEAR TYPE	
S7H15G□-V12	
STRAIGHT TYPE	
S7H15S□-V12	
D-CUT TYPE	
S7H15D□-V12	

✚ WEIGHT – (表2 (Table2))

PART		WEIGHT(kg)
MOTOR		1.04
DECIMAL GEAR HEAD		0.32
GEAR HEAD	S7□A3□ ~S7□A18□	0.38
	S7□A20□ ~S7□A40□	0.47
	S7□A50□ ~S7□A200□	0.52