

10W

TORQUE MOTOR □80㎜ LEAD WIRE TYPE

SIZE mm sq.	Type	Poles	Output	Voltage	Frequency	Duty	Rated Load					Starting Torque		Capacitor
							Speed	Torque		Current	Input			
			(W)	(V)	(Hz)		(rpm)	(kg-cm)	(N-m)	(A)	(W)	(kg-cm)	(N-m)	(uF)
80	S8T10GB	4	12.8	1 ø 220	60	5min.	900	1.34	0.134	0.34	74.2	2.41	0.241	2.0
			4.3	1 ø 140		Cont.		0.52	0.052	0.24	33.3	0.98	0.098	

❖ 'L' TYPE 전용으로 기종명에 표시하지 않습니다. ("L"or "H"type does not apply to motors under 20W.)

60Hz

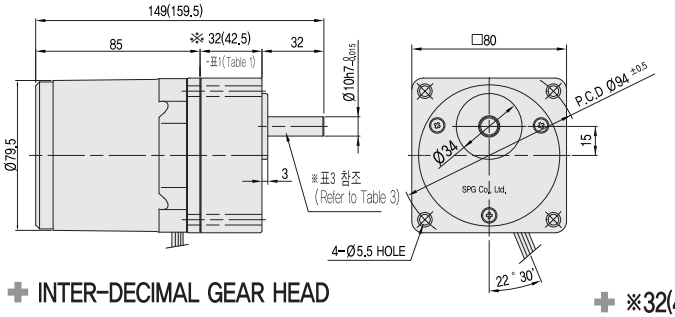
GEAR RATIO			3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S8KA□B	5min	kg-cm	3.3	3.9	5.4	6.5	8.1	9.8	10.9	13.6	16.3	19.5	19.6	24.5	29.3	35.2	39.1	44.2	53.1	66.3	79.6	80	80	80	80	80
		N·m	0.32	0.38	0.53	0.64	0.80	0.96	1.06	1.33	1.60	1.92	1.92	2.40	2.88	3.45	3.84	4.34	5.20	6.50	7.81	7.85	7.85	7.85	7.85	7.85
	Cont.	kg-cm	1.3	1.5	2.1	2.5	3.2	3.8	4.2	5.3	6.3	7.6	7.6	9.5	11.4	13.7	15.2	17.2	20.6	25.7	30.9	34.3	41.2	51.5	61.8	68.6
		N·m	0.12	0.15	0.21	0.25	0.31	0.37	0.41	0.52	0.62	0.74	0.74	0.93	1.12	1.34	1.49	1.68	2.02	2.52	3.03	3.37	4.04	5.05	6.06	6.73

❖ GEAR HEAD 품명중 □은 감속비를 표시합니다. (The code in □ of gearhead model is for gear ratio.)
❖ GEAR HEAD와 조합한 경우의 허용 TORQUE입니다. (It is the permissible torque of the assembled motor and gearhead.)
❖ 감속비 1/10의 중간 GEAR HEAD를 접속한 경우의 허용 TORQUE는 80㎏-㎝입니다. (The permissible torque of the motor and inter-decimal gearhead is 80 kg-cm.)
❖ 회전방향은 ■색이 MOTOR의 회전방향과 동일방향이고, 기타는 MOTOR 회전방향과 반대방향 입니다. (■ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.)
❖ 회전수는 MOTOR의 동기 회전수(50Hz : 1500rpm, 60Hz : 1800rpm)를 기준으로 하여 감속비로 나누어서 계산하였습니다. 실제의 회전수는 부하의 크기에 따라서 표시된 수치보다 2~20% 적습니다. (Rpm is based on synchronous speed (50Hz: 1500rpm, 60Hz: 1800rpm) divided by gear ratio. The actual rotation speed can be 2~20% less than displayed value depending on the load.)
❖ 'L' Type 전용으로 기종명에 표시하지 않습니다. ("L"or "H"type does not apply to motors under 20W.)

DIMENSIONS


✚ GEARED MOTOR

※MOTOR MODEL : S8T10GB
※HEAD MODEL : S8□A3B~S8□A200B




✚ INTER-DECIMAL GEAR HEAD

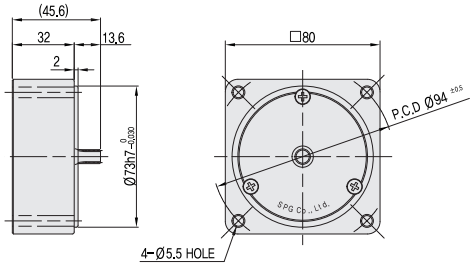※ MODEL : S8GX10B



✚ MOTOR

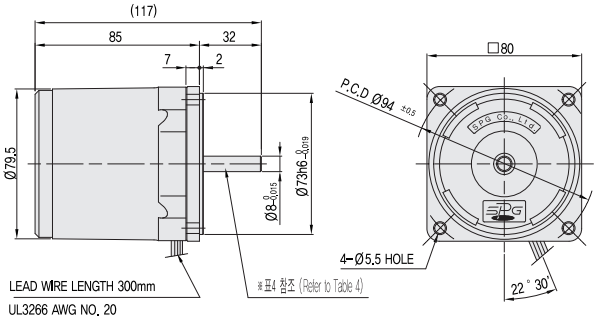※MOTOR MODEL : S8T10□B





✚ ※32(42.5) – (표1 (Table1))

GEAR RATIO	SIZE(mm)
S8□A3B ~ S8□A18B	32
S8□A20B ~ S8□A200B	42.5




✚ WEIGHT – (표2 (Table2))

PART		WEIGHT(kg)
MOTOR		1.46
DECIMAL GEAR HEAD		0.43
GEAR HEAD	S8□A3B ~S8□A18B	0.43
	S8□A20B ~S8□A40B	0.57
	S8□A50B ~S8□A200B	0.61




✚ KEY SPEC

GEAR HEAD	MOTOR
	

✚ GEAR HEAD 출력축 사양 (SPEC for output shaft of gearhead) – (표3 (Table3))

MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
STRAIGHT TYPE S8SA3B ~S8SA200B	
D-CUT TYPE S8DA3B ~S8DA200B	
KEY TYPE S8KA3B ~S8KA200B	

✚ MOTOR 출력축 사양 (SPEC for output shaft of motor) – (표4 (Table4))


MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
GEAR TYPE S8T10GB	
STRAIGHT TYPE S8T10SB	
D-CUT TYPE S8T10DB	
KEY TYPE S8T10KB	

SCHEMATIC DIAGRAMS

회전방향은 MOTOR의 SHAFT 끝쪽에서 볼 때의 회전방향입니다. (The direction of motor rotation is as viewed from the front shaft end of the motor.)

S8T10GB

CW,CCW



주의 : MOTOR 회전 방향의 교환은 MOTOR가 완전히 정지한 후에 실시하여 주십시오. MOTOR가 회전 중에 회전방향을 교환할 경우 회전방향이 바뀌지 않거나 회전방향이 바뀌어지는 데 있어서 시간이 걸리는 수도 있습니다. (Change the direction of motor rotation only after the motor stops completely. If an attempt is made to change the direction of rotation while the motor is running, the motor may ignore the reversing command or change its direction of rotation after some delay.)