

25W

ELECTROMAGNETIC BRAKE MOTOR
□80㎜ LEAD WIRE TYPE

SIZE mm sq.	Type	Poles	Output	Voltage	Frequency	Duty	Rated Load				Starting Torque		Capacitor
							Current	Speed	Torque				
			(W)	(V)	(Hz)		(A)	(rpm)	(kg-cm)	(N-m)	(kg-cm)	(N-m)	(uF)
80	S8R25GA-E S8R25GA-E(TP) S8R25GA-ECE	4	25	1Ø 110	60	30min.	0.73	1550	1.62	0.162	2.40	0.240	10.0
	S8R25GB-E S8R25GB-E(TP) S8R25GB-ECE	4	25	1Ø 220	60	30min.	0.36	1550	1.62	0.162	2.40	0.240	2.5
	S8R25GC-E S8R25GC-E(TP) S8R25GC-ECE	4	25	1Ø 100	50	30min.	0.60	1250	2.00	0.200	2.20	0.220	10.0
					60		0.70	1500	1.70	0.170			
	S8R25GD-E S8R25GD-E(TP) S8R25GD-ECE	4	25	1Ø 200	50	30min.	0.30	1250	2.00	0.200	2.00	0.200	2.5
					60		0.35	1500	1.70	0.170			
	S8R25GE-E S8R25GE-ECE	4	25	1Ø 100	50	30min.	0.58	1250	2.00	0.200	1.60	0.160	8.0
					60		0.54	1550	1.70	0.170			
				1Ø 115	60		0.52	1600	1.65	0.165	1.90	0.190	7.0
	S8R25GX-E S8R25GX-ECE	4	25	1Ø 220	50	30min.	0.25	1250	2.00	0.200	2.10	0.210	2.0
				1Ø 240			0.27		2.10	0.210	2.50	0.250	
	S8I25GU-E S8I25GU-ECE	4	25	3Ø 200	50	Cont.	0.26	1300	1.95	0.195	3.50	0.350	—
					60		0.24	1550	1.65	0.165	2.90	0.290	
	S8I25GT-E S8I25GT-ECE	4	25	3Ø 220	50	Cont.	0.28	1350	1.90	0.190	4.20	0.420	—
					60		0.24	1600	1.60	0.160	3.50	0.350	
	S8I25GS-E S8I25GS-ECE	4	25	3Ø 380	50	Cont.	0.14	1250	2.00	0.200	3.15	0.315	—
					60		0.12	1500	1.70	0.170	2.50	0.250	
				3Ø 400	50	Cont.	0.14	1250	2.10	0.210	3.50	0.350	
					60		0.12	1500	1.80	0.180	2.75	0.275	
				3Ø 415	50	Cont.	0.15	1300	1.95	0.195	3.75	0.375	
					60		0.13	1550	1.65	0.165	3.00	0.300	
				3Ø 440	50	Cont.	0.15	1300	2.10	0.210	4.40	0.440	
					60		0.13	1600	1.60	0.160	3.40	0.340	

❖ 기종명 S8R25GE-E는 UL 규격 인증 제품으로 THERMALLY PROTECTED TYPE입니다.(UL FILE NO. E172720) (S8R25GE-E is UL approved(UL FILE NO. E172720) thermally protected type.)
❖ 사용하는 전압 사양에 따라 CONDENSER 용량이 다르게 사용되므로 사용전압에 맞게 CONDENSER 용량을 바르게 사용하여 주십시오. 고장의 원인이 됩니다. 주문시 사용전압을 제시하여 주십시오. 제시가 없으면 115V용 CONDENSER로 포장 출하됩니다. (Appropriate capacitors shall be used according to the voltage for S8R25GE-E type since the size of the capacitor differs by different voltages. Malfunction may occur when not used properly. Capacitor for 115V will be delivered otherwise the required voltage is informed.)
❖ 기종명 맨 끝자리에 CE가 명기된 MODEL의 인증 관련 내용은 SPG 규격 인증품 현황을 참고하여 주십시오. S8R25GE-ECE는 115V용 사양으로만 출하됩니다. (CE marked at the end of model name indicates that it is thermally protected type which has received CE. S8R25GE-ECE is available only for 115V specification.)
❖ 기종명 맨끝자리에 TP가 명기된 MODEL은 일반 MOTOR에 TP가 내장된 THERMALLY PROTECTED TYPE입니다. 또한 기종명 S8R25GE-E, S8R25GX-E는 TP가 내장된 THERMALLY PROTECTED TYPE입니다. (TP marked at the end of the model name indicates that it is standard motor with Thermal Protector mounted. S8R25GE-E, S8R25GX-E is thermally protected type with TP mounted.)
❖ 본 DATA는 전자 BRAKE MOTOR에서 전자 BRAKE를 제거하고 MOTOR 단독으로 측정한 DATA입니다. (Above data is measured with brake removed from electromagnetic brake motor.Above data is measured with brake removed from electromagnetic brake motor.)
❖ 'L' Type 전용으로 기종명에 표시하지 않습니다. ("L" or "H" type does not apply to motors under 40W.)
❖ 삼상 380V~440V 모터에서는 인버터 사용을 주의하여 주십시오. 인버터 사용시 권선의 절연이 열화되어 모터가 파손될 수 있습니다. (For a three-phase 380V~440V motor, be cautious when using the inverter. When inverter is used, the insulation of winding becomes hot and may cause damage to motor.)

50Hz

GEAR RATIO / MODEL		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
	rpm	500	416	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8	7.5
S8KA□B	kg-cm	5.3	6.4	8.9	10.7	13.4	16.0	17.8	22.3	26.7	32.1	32.1	40.2	48.2	57.8	64.2	72.6	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
	N·m	0.519	0.627	0.872	1.049	1.313	1.568	1.744	2.185	2.617	3.146	3.146	3.940	4.724	5.664	6.292	7.115	7.840	7.840	7.840	7.840	7.840	7.840	7.840	7.840

60Hz

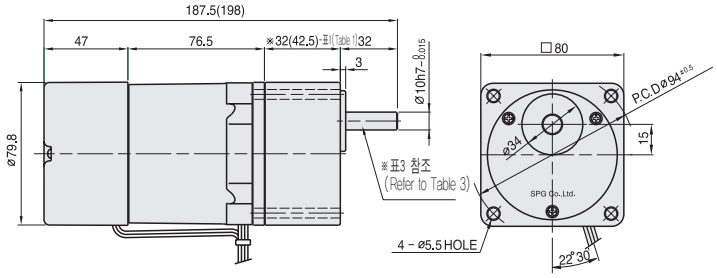
GEAR RATIO / MODEL		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
	rpm	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
S8KA□B	kg-cm	4.4	5.2	7.3	8.7	10.9	13.1	14.6	18.2	21.9	26.2	26.3	32.9	39.4	47.3	52.6	59.4	71.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0
	N·m	0.431	0.510	0.715	0.853	1.068	1.284	1.431	1.784	2.146	2.568	2.577	3.224	3.861	4.635	5.155	5.821	6.987	7.840	7.840	7.840	7.840	7.840	7.840	7.840

❖ GEAR HEAD 품명중 □은 감속비를 표시합니다. (The code in □ of gearhead model is for gear ratio.)
❖ GEAR HEAD와 조합한 경우의 허용 TORQUE입니다. (It is the permissible torque of the assembled motor and gearhead.)
❖ 감속비 1/10의 중간 GEAR HEAD를 접속한 경우의 허용 TORQUE는 80㎏-㎝입니다. (The permissible torque of the motor and inter-decimal gearhead is 80 kg-cm.)
❖ 회전방향은 ■ 색이 MOTOR의 회전방향과 동일방향이고, 기타는 MOTOR 회전방향과 반대방향입니다. (■ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.)
❖ 회전수는 MOTOR의 동기 회전수(50Hz : 1500rpm, 60Hz : 1800rpm)를 기준으로 하여 감속비로 나누어서 계산하였습니다. 실제의 회전수는 부하의 크기에 따라서 표시된 수치보다 2~20% 적습니다. (Rpm is based on synchronous speed (50Hz: 1500rpm, 60Hz: 1800rpm) divided by gear ratio. The actual rotation speed can be 2~20% less than displayed value depending on the load.)
❖ 'L' Type 전용으로 기종명에 표시하지 않습니다. ("L" or "H" type does not apply to motors under 40W.)

DIMENSIONS

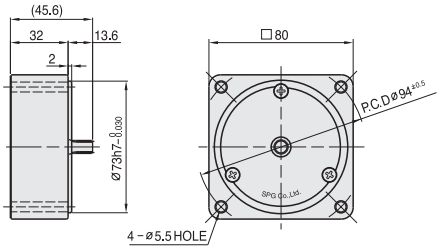
GEARED MOTOR

※MOTOR MODEL : S8R25G□-E
※HEAD MODEL : S8□A3□~S8□A200□



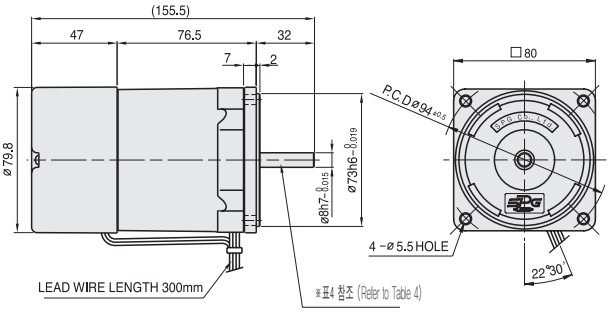
INTER-DECIMAL GEAR HEAD

※MODEL : S8GX10B



MOTOR

※MOTOR MODEL : S8R25□□-E





※32(42.5) - (표1 (Table1))

GEAR RATIO	SIZE(㎜)
S8□A3□ ~ S8□A18□	32
S8□A20□ ~ S8□A200□	42.5




WEIGHT - (표2 (Table2))

PART		WEIGHT(kg)
MOTOR		1.86
DECIMAL GEAR HEAD		0.43
GEAR HEAD	S8□A3□ ~S8□A18□	0.43
	S8□A20□ ~S8□A40□	0.57
	S8□A50□ ~S8□A200□	0.61





KEY SPEC

GEAR HEAD	MOTOR
	

GEAR HEAD 출력축 사양 (SPEC for output shaft of gearhead) - (표3 (Table3))








MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
STRAIGHT TYPE S8SA3□ ~S8SA200□	
D-CUT TYPE S8DA3□ ~S8DA200□	
KEY TYPE S8KA3□ ~S8KA200□	





MOTOR 출력축 사양 (SPEC for output shaft of motor) - (표4 (Table4))

MODEL	출력축 구분 (TYPES OF OUTPUT SHAFT)
GEAR TYPE S8R25G□-E	
STRAIGHT TYPE S8R25S□-E	
D-CUT TYPE S8R25D□-E	
KEY TYPE S8R25K□-E	

SCHEMATIC DIAGRAMS

회전방향은 MOTOR의 SHAFT 끝쪽에서 볼 때의 회전방향입니다. (The direction of motor rotation is as viewed from the front shaft end of the motor.)

S8R25GA-E S8R25GC-E	S8R25GA-ECE S8R25GC-ECE S8R25GE-E S8R25GE-ECE	S8R25GB-E S8R25GD-E	S8R25GB-ECE S8R25GD-ECE	S8R25GX-E S8R25GX-ECE	S8I25GU-E S8I25GT-E	
CW,CCW	**CW,CCW**	**CW,CCW**	**CW,CCW**	**CW,CCW**	**CW**	**CCW**
						

S8I25GU-ECE S8I25GT-ECE		S8I25GS-E S8I25GS-ECE	
CW	**CCW**	**CW**	**CCW**
			

$R_1 = 10 \sim 200\,\Omega$ (Min1/4W) $C_1 = 0.1 \sim 0.33\,\mu F$ (AC125WV or AC250WV)